



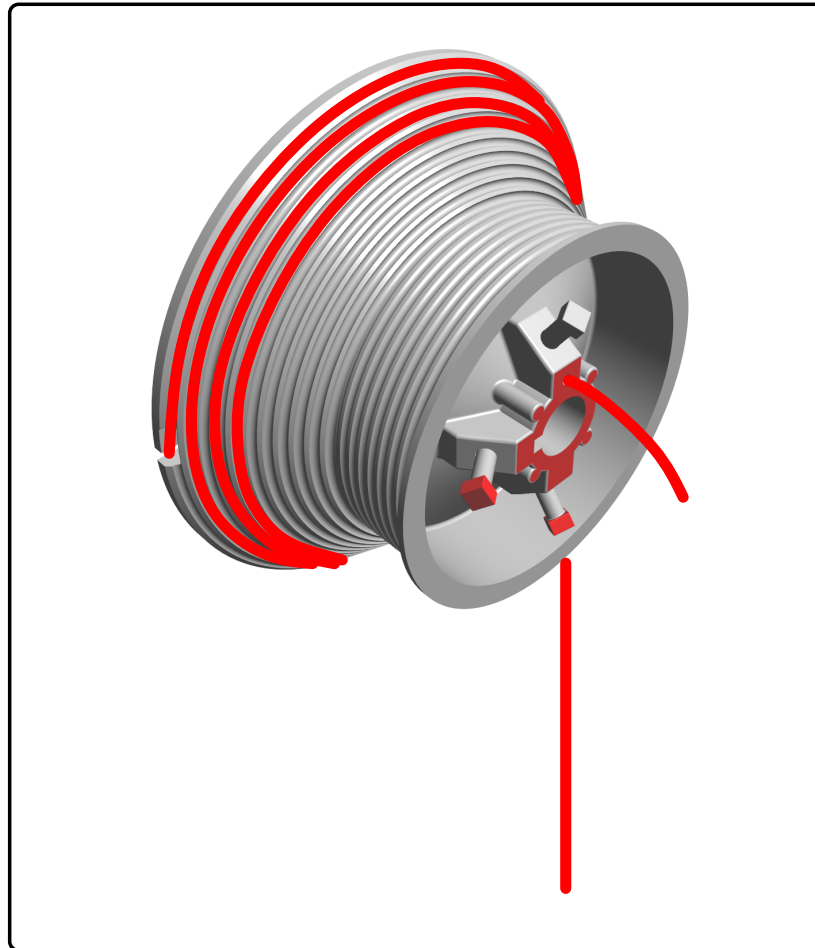

SYSTEM HL

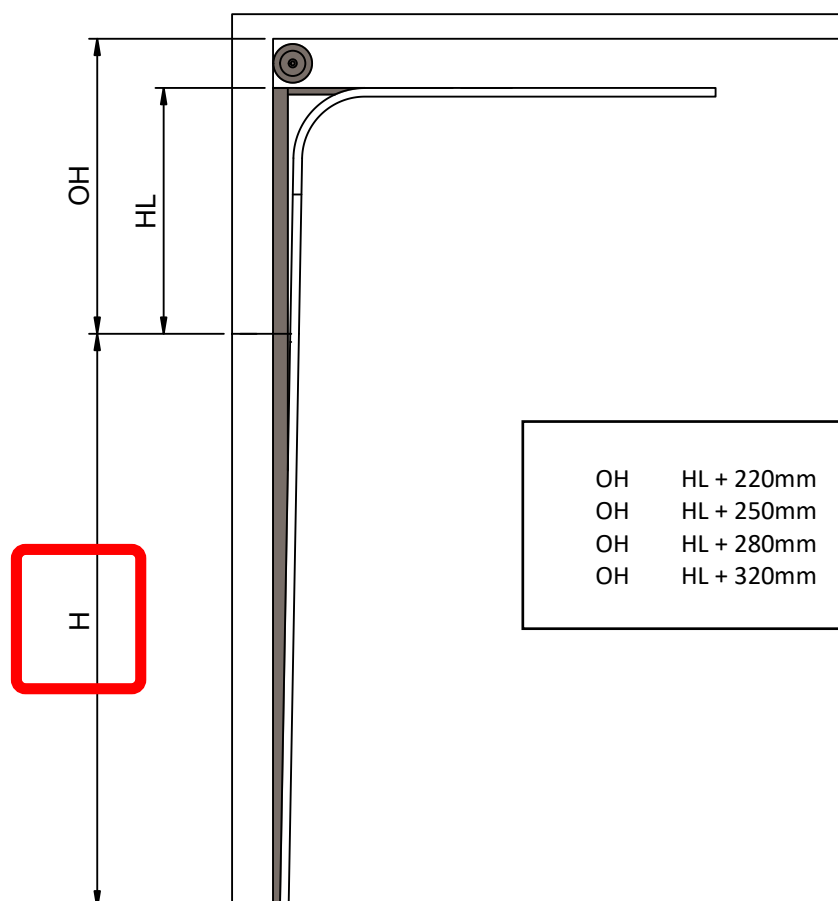

OH	HL + 220mm	(4072 HL)
OH	HL + 250mm	(4099 HL)
OH	HL + 280mm	(40101 HL)
OH	HL + 320mm	(40156 HL)

INSTRUKCJA MONTAŻU LINKI NA BĘBNIE W SYSTEMIE BRAMY PRZEMYSŁOWEJ HIGH LIFT

	4072 HL 72mm ø25.5mm	4099 HL 98mm ø25.5mm	40101 HL 93mm ø25.5mm	40156 HL 152mm ø25.5mm
no safety winding	max HL 1600mm D 3290mm	max HL 1690mm D 4680mm	max HL 3240mm D 3860mm	max HL 5800mm D 5800mm
bez zwojów bezpieczeństwa	max H 4890mm	max H 6370mm	max H 7100mm	max H 11600mm
half safety winding	max HL 1370mm D 3290mm	max HL 1410mm D 4680mm	max HL 2890mm D 3860mm	max HL 5400mm D 5800mm
połowa zwoju bezpieczeństwa	max H 4660mm	max H 6090mm	max H 6750mm	max H 11200mm
two safety windings	max HL 720mm D 3290mm	max HL 590mm D 4680mm	max HL 1840mm D 3860mm	max HL 4100mm D 5800mm
dwa zwoje bezpieczeństwa	max H 4010mm	max H 5270mm	max H 5700mm	max H 9900mm

